

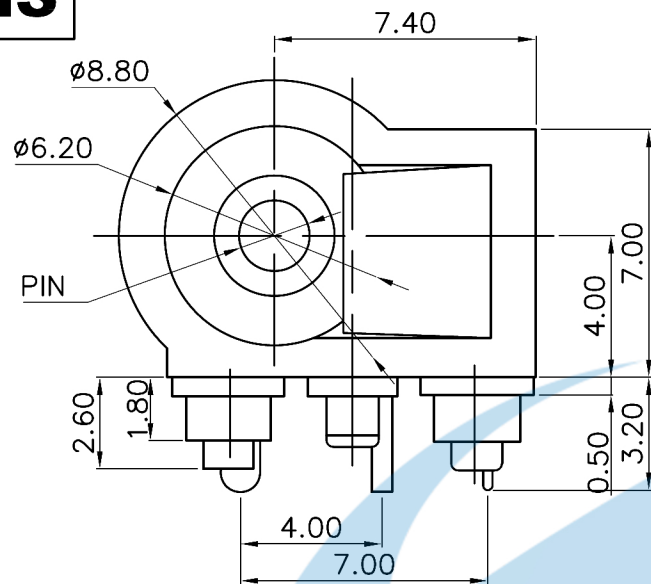
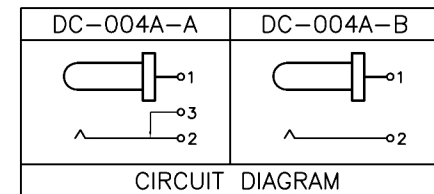



ROHS

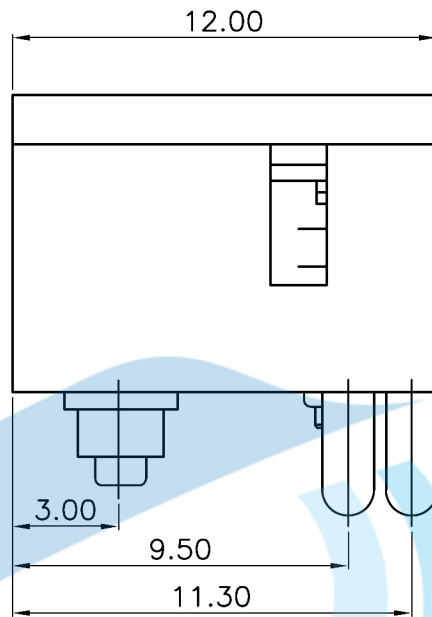

P.C.B LAYOUT(Copper-side view)

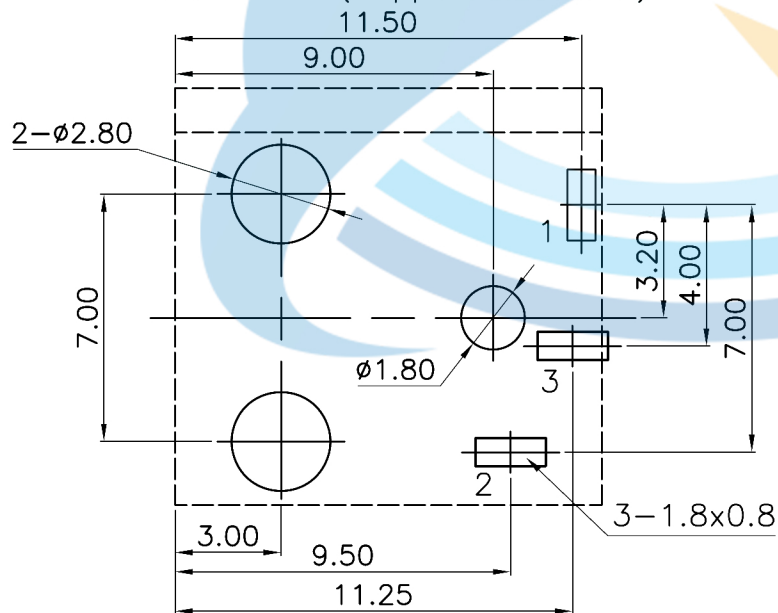

Model No.	1	2
PIN	ø2.0	ø2.5

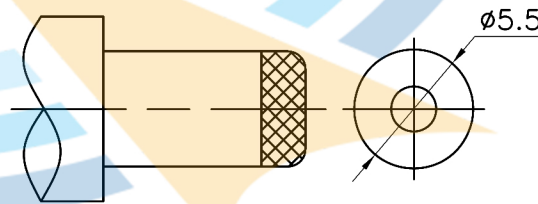

DC MATE PLUG

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

②	Terminal	_____	3	Phosphor bronze	Au Plating	_____
①	Housing	_____	1	Nylon	Black	_____
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	 东莞市颖鑫电子科技有限公司		
DRAWN	J.X.Zhang	2013/11/11				
CHECKED			TITLE:	PHONE JACKES		
APPROVALS			PART NO.	DC-004A		
TOLERANCES ARE	30~以下	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	±0.20		DRAWING NO.	_____	SHEET 1 OF 1
	5~10	±0.15				
	~ 5	±0.10				
		±2'				

	A		NEW		
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK. APPRO.