
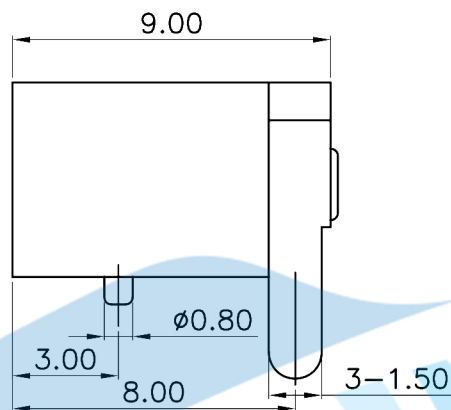
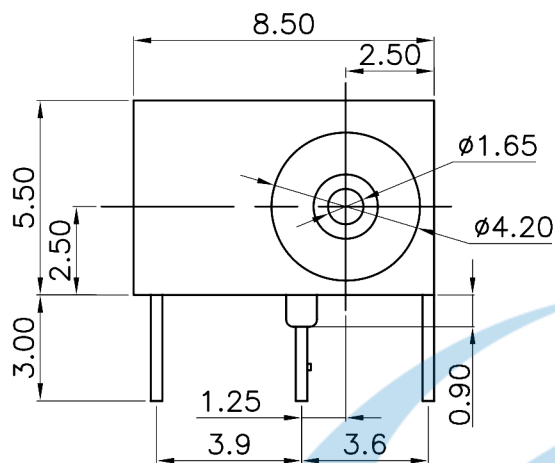
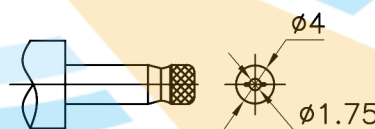


P.C.B LAYOUT(Copper-side view)

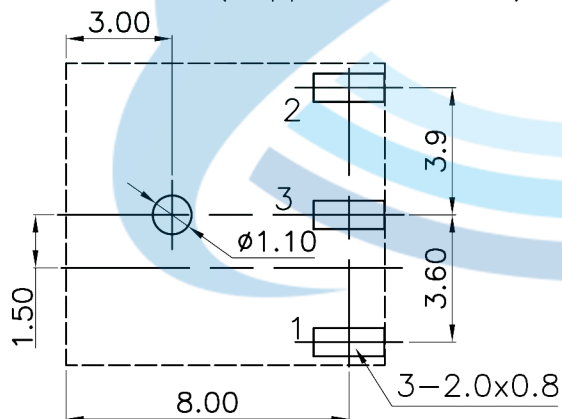

DC MATE PLUG

Rating:0.5A 30V DC
Contact Resistance:100 m Ω Max.
Operating temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C
Operating force:3-20N
Operating Life:5,000cycles

②	Terminal	—	3	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE		 东莞市颖鑫电子科技有限公司	
DRAWN	J.X.Zhang	2013/11/11		TITLE:		PHONE JACKES
CHECKED				PART NO.		DC-006D
APPROVALS					UNIT: mm SCALE: 1:1 PROJ: 	
TOLERANCES ARE			30~0.1	±0.30		
			10~30	±0.20		
			5~10	±0.15		
			~ 5	±0.10		
			ANGLE	±2'	DRAWING NO.	
					SHEET 1 OF 1	

ECN NO.	REV.	DATE.	NEW DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A					