


P.C.B LAYOUT(Copper-side view)

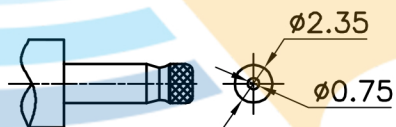

DC MATE PLUG

Rating: 0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

④	Terminal 3	—	1	Phosphor bronze	Ag Plating	—
③	Terminal 2	—	1	SUS	Ag Plating	—
②	Terminal 1	—	1	Phosphor bronze	Ag Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	东莞市颖鑫电子科技有限公司				
DRAWN	J.X.Zhang	2013/11/11					
CHECKED			TITLE:	PHONE JACKES			
APPROVALS			PART NO.	DC-011			
TOLERANCES ARE			30~12.1 ±0.30 10~30 ±0.20 5~10 ±0.15 ~ 5 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
			±2'	DRAWING NO.			SHEET 1 OF 1

ECN NO.	REV.	DATE.	NEW	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
---------	------	-------	-----	--------------	---------	--------	--------