

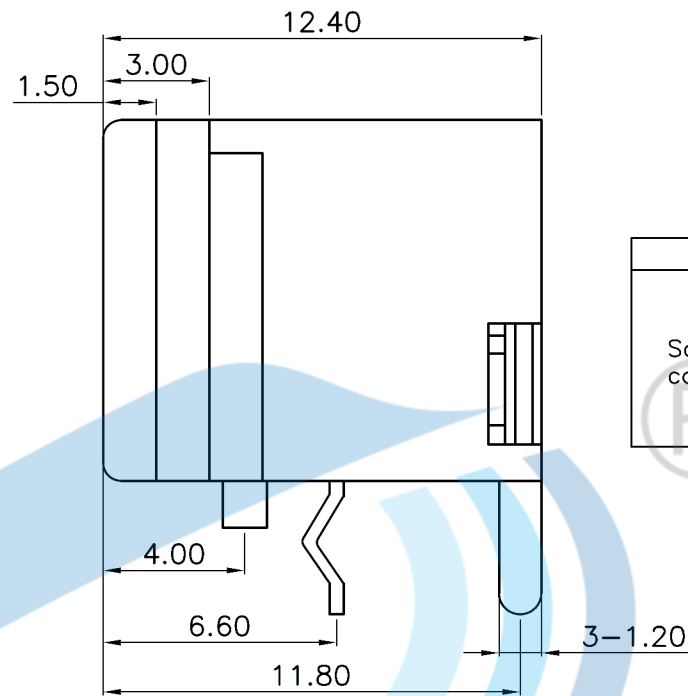
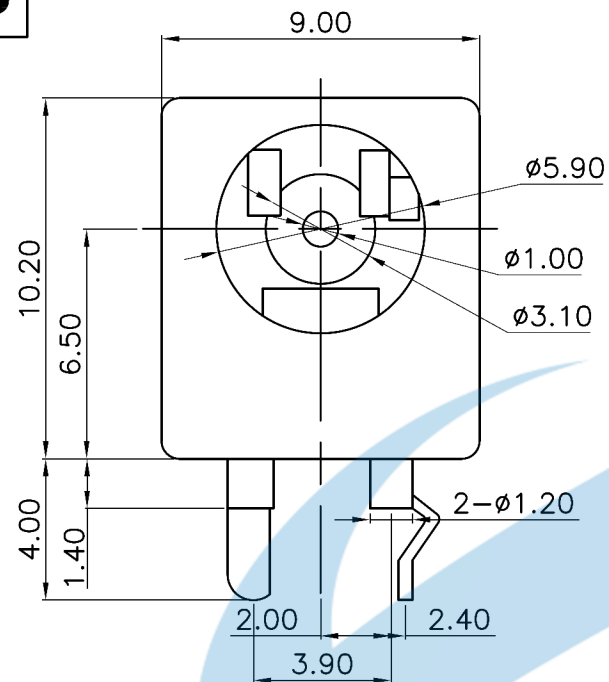


ROHS

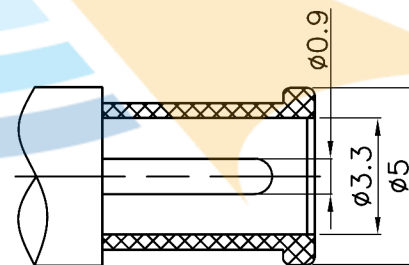

P/N	DC-029-A	DC-029-B
Schematic code		

P.C.B LAYOUT(copper-sided view)

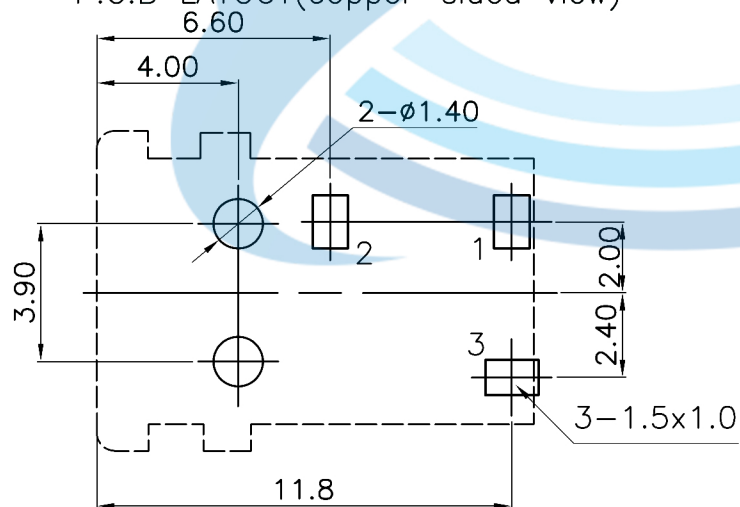

DC MATE PLUG

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

②	Terminal	——	3	Phosphor bronze	Au Plating	——
①	Housing	——	1	Nylon	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	 东莞市颖鑫电子科技有限公司		
DRAWN	J.X.Zhang	2013/11/11				
CHECKED				TITLE:	PHONE JACKES	
APPROVALS				PART NO.	DC-029	
TOLERANCES ARE		30~100	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10			
		±2'		DRAWING NO.	——	SHEET 1 OF

ECN NO.

REV.

DATE.

DESCRIPTION.

CHANGE.

CHECK.

APPRO.

DRAWING NO.

SHEET 1 OF 1