

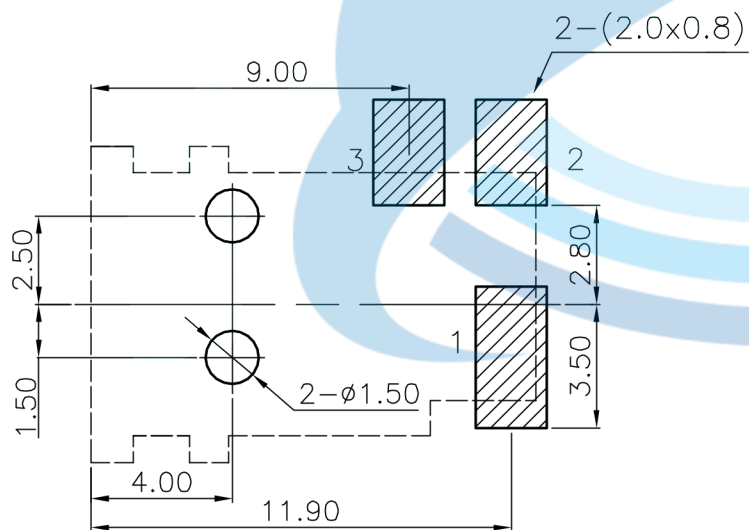
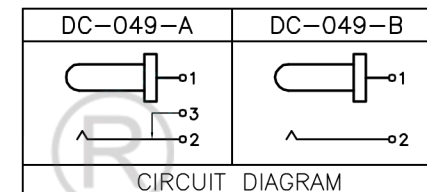
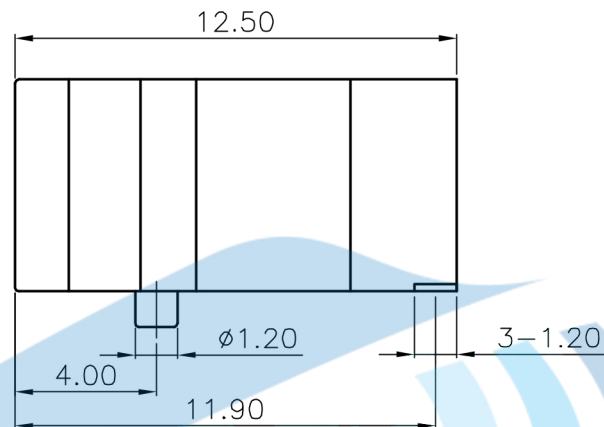


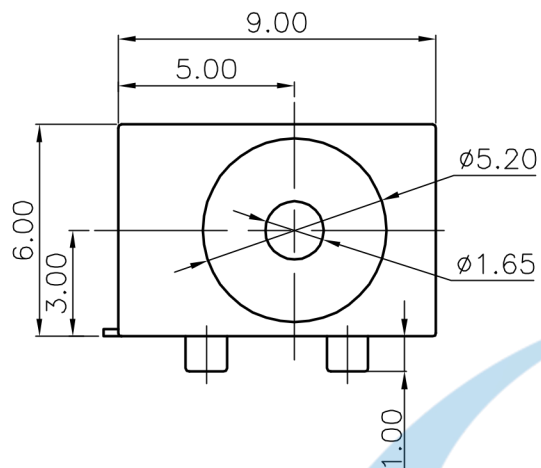

P.C.B LAYOUT(copper-sided view)

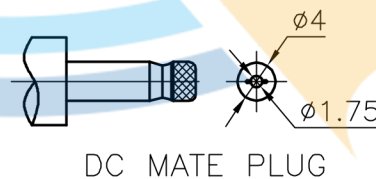

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

②	Terminal	_____	3	Phosphor bronze	Au Plating	_____	
①	Housing	_____	1	Nylon	Black	_____	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK	
APPROVALS			DATE	 东莞市颖鑫电子科技有限公司			
DRAWN	J.X.Zhang	2013/11/11					
CHECKED							
APPROVALS							
				TITLE:	PHONE JACKES		
				PART NO.	DC-049A		
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.20				
		5~10	±0.15				
		~ 5	±0.10				
		±2'		DRAWING NO.	_____	SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			