

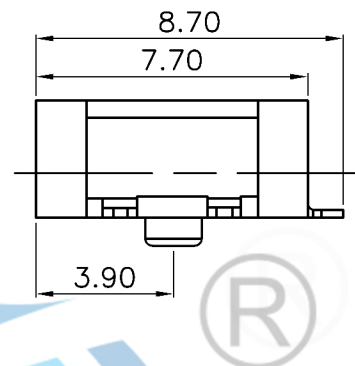
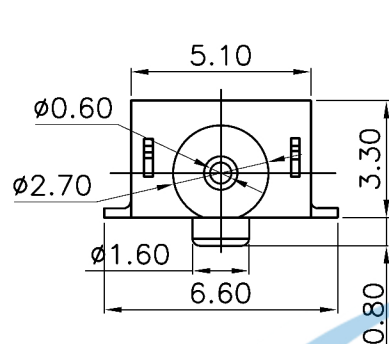




P.C.B LAYOUT Top VIEW

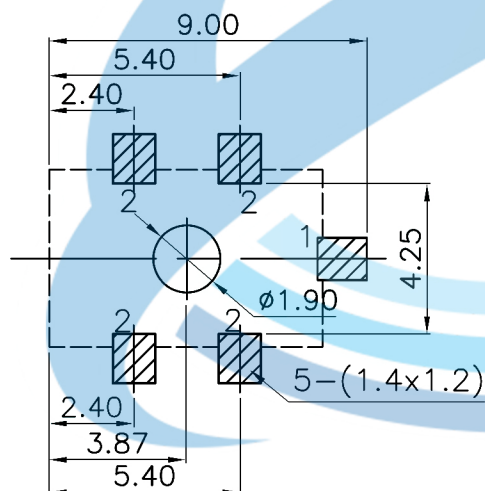

CIRCUIT DIAGRAM

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

②	Terminal	——	5	Phosphor bronze	Au Plating	——		
①	Housing	——	1	Nylon	Black	——		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK		
APPROVALS			DATE	 东莞市颖鑫电子科技有限公司				
DRAWN		J.X.Zhang	2013/11/11					
CHECKED								
APPROVALS				TITLE:	PHONE JACKES			
				PART NO.	DC-062			
D.	TOLERANCES ARE		30~100	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
			10~30	±0.20				
			5~10	±0.15				
			~ 5	±0.10				
				±2'				
			DRAWING NO.		——	SHEET 1 OF		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			