

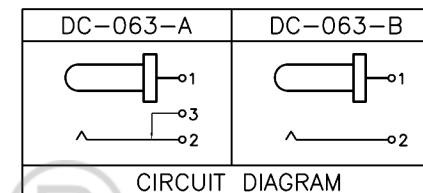
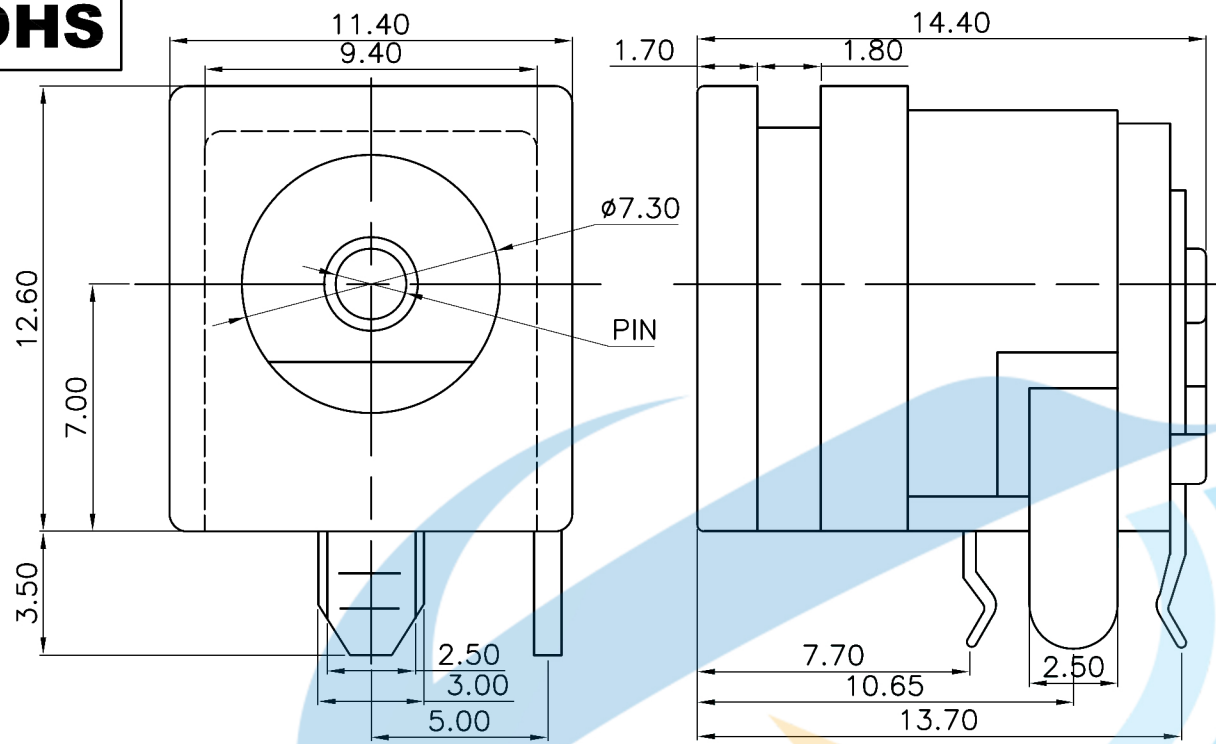


ROHS

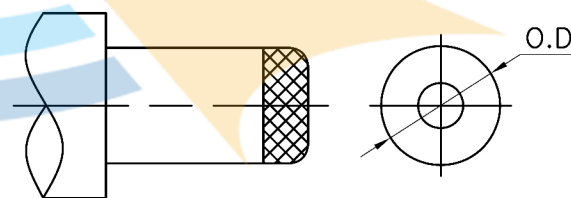

Model No.	1	2	3
PIN	$\phi 2.0$	$\phi 2.5$	$\phi 3.0$
DC PLUG O.D.	$\phi 5.5$	$\phi 5.5$	$\phi 6.55$

P.C.B LAYOUT(copper-sided view)

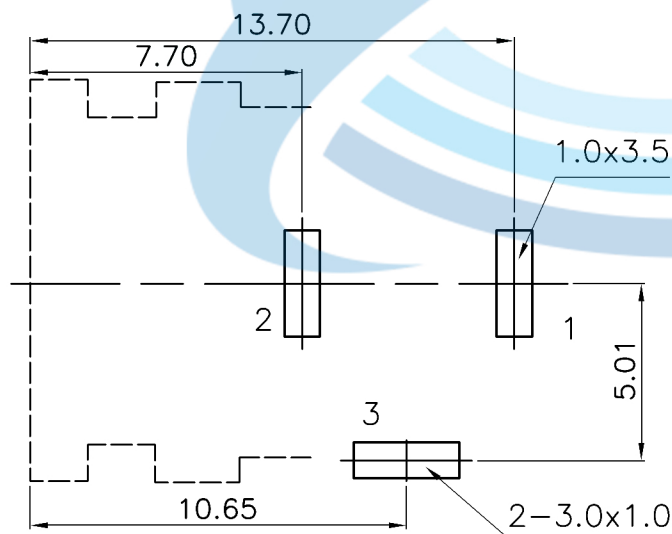

DC MATE PLUG

Rating:0.5A 30V DC
Contact Resistance:100 m Ω Max.
Operating temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C
Operating force:3-20N
Operating Life:5,000cycles

②	Terminal	——	3	Phosphor bronze	Au Plating	——
①	Housing	——	1	Nylon	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	 东莞市颖鑫电子科技有限公司		
DRAWN	J.X.Zhang	2013/11/11				
CHECKED				TITLE:	PHONE JACKES	
APPROVALS				PART NO.	DC-063	
TOLERANCES ARE			30~以上	±0.30	ANGLE	UNIT: mm
			10~30	±0.20		
			5~10	±0.15		
			~ 5	±0.10		
			±2'	DRAWING NO.	——	SCALE: 1:1
						PROJ: 
						SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			