

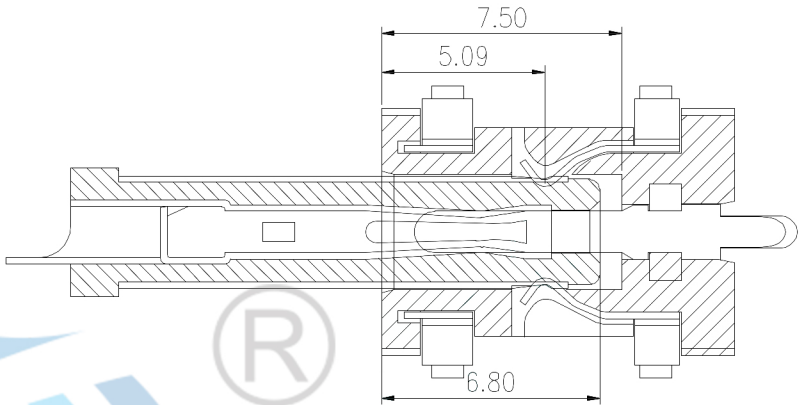
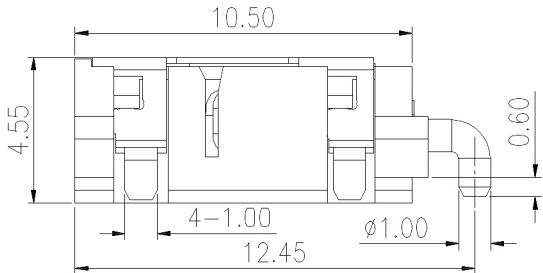


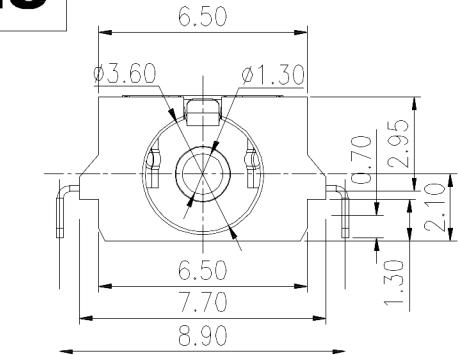


DC JACK INSERT DEPTH


Specifications:
Rating: 3A 24V
Contact Resistance:30 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:2.94-29.4N
Operating Life:5,000cycles Min

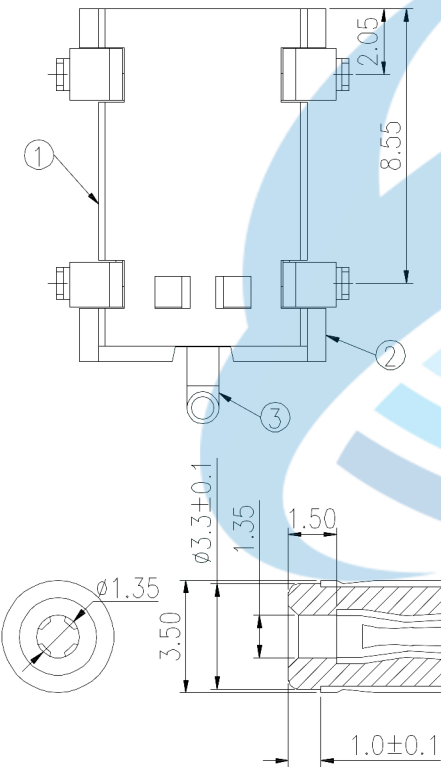

DC MATE PLUG

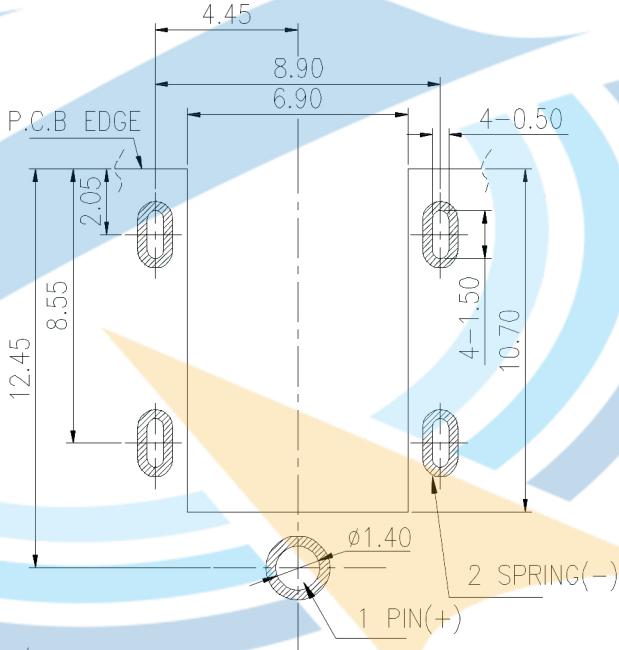

RECOMMENDED PCB LAYOUT
TOP VIEW (TOLERANCE:±0.05)



③	Center Pin	—	1	Brass	Au Plating	—
②	Terminal	—	1	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE		 东莞市颖鑫电子科技有限公司			
DRAWN	J.X.Zhang	2013/11/11					
CHECKED				TITLE:	DC JACKES		
APPROVALS				PART NO.	DC-183		
TOLERANCES ARE		30~125	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.20				
		5~10	±0.15				
		~ 5	±0.10				
		±2°		DRAWING NO.			SHEET 1 OF 1

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.